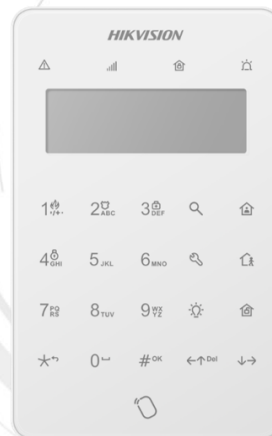


DS-PK501LTM-HWE

- LCD screen display
- Supports one-touch arm (Arming without password)
- Supports Fire/Panic/Medical alarm key
- Supports 2 on-board alarm inputs and 1 on-board relay output
- Supports maximum 64 keyfobs and emergency button
- Supports sliding back cover opening to simplify installation.

▪ Specification

| Hardware features | |
|----------------------------|--|
| Tag reader built-in | 1 |
| Tamper-Proof | Wall tamper Cover tamper |
| Buzzer | 1 |
| Alarm input | 2 |
| IO output | 1 |
| Electrical characteristics | |
| Storage temperature | -20°C to 60°C (-4°F to 140°F) |
| Power supply | 9-16 V |
| Operation humidity | 10% ~ 90% noncondensing |
| Operation temperature | -10°C to 40°C (14°F to 104°F) |
| Power consumption | Quiescent Current 40 mA @12VDC |
| | Maximum Current 200 mA @12VDC |
| Wireless transmission | |
| RF frequency | 868.0-868.6 MHz |
| Display | |
| Display screen | Mono LCD |
| LED indicator | Signal : Green/Red indicate Bus status Fault : Amber indicate system on abnormal Alarm : Red indicate system on alert arm/disarm : Blue/Green indicate system on arm/disarm |
| General | |
| Dimension (W×H×D) | 175 × 110 × 27 mm |
| Weight | 301g |
| Device management | |
| Wireless emergency button | 64 |
| Keyfob | 64 |

▪ Available Model

DS-PK501LTM-HWE

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq